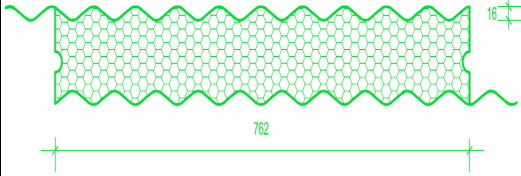
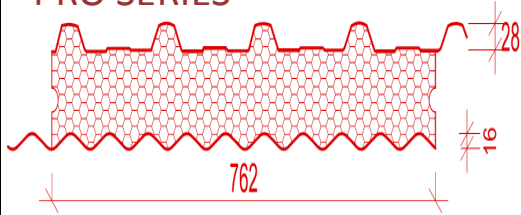
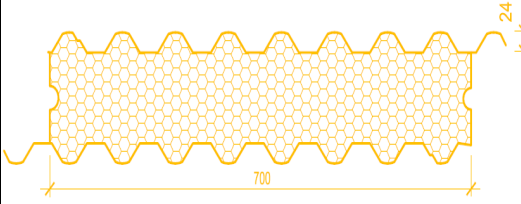
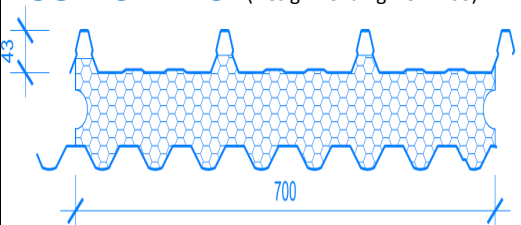
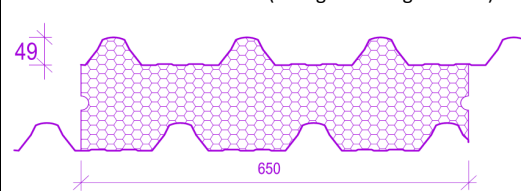


PRODUCT RANGE

Series	Shape	Pitch	Cover mm	Thickness mm.	Thermal Value	Roof Walls
CLASSIC SERIES 	Straight Curved Multi Curved Bull Nosed	5° +	762	75	R 2.01	✓ ✓
				100	R 2.64	✓ ✓
				125	R 3.50	✓ ✓
				140	R 3.65	✓ ✓
				165	R 4.28	✓ ✓
				200	R 5.00	✓ ✓
				250	R 6.25	✓ ✓
300	R 7.50	✓ ✓				
PRO SERIES 	Straight Curved confirm radius with Tridek	2° +	762	100	R 2.64	✓ ✓
				125	R 3.50	✓ ✓
				140	R 3.65	✓ ✓
				165	R 4.28	✓ ✓
				200	R 5.00	✓ ✓
				250	R 6.25	✓ ✓
				300	R 7.50	✓ ✓
SMART SERIES 	Straight Curved confirm radius with Tridek	2° +	700	75	R 2.01	✓ ✓
				100	R 2.64	✓ ✓
				125	R 3.50	✓ ✓
				140	R 3.65	✓ ✓
				165	R 4.28	✓ ✓
				200	R 5.00	✓ ✓
				250	R 6.25	✓ ✓
300	R 7.50	✓ ✓				
ICON SERIES (Design Pending 342760) 	Straight only	1° +	700	125	R 2.16	✓ ✓
				140	R 2.56	✓ ✓
				165	R 3.22	✓ ✓
				200	R 4.14	✓ ✓
				250	R 5.46	✓ ✓
				300	R 6.78	✓ ✓
ELITE SERIES (Design Pending 342761) 	Straight only	1° +	650	125	R 2.20	✓ ✓
				140	R 2.40	✓ ✓
				165	R 3.06	✓ ✓
				200	R 3.98	✓ ✓
				250	R 5.30	✓ ✓
				300	R 6.62	✓ ✓

Evamax Long Life Material – see technical page for more details

Thermally Broken Panel – see technical page for more details

Please consult the Tridek Sales Office for availability of other core thickness and confirmation of curve radii Due to our ongoing commitment to product development and testing Zipperlock Steel Buildings Pty Ltd, retains the right to amend or change data without notice. © July 2012 Zipperlock Steel Buildings Pty Ltd. Not to be copied without permission.