


TRIDEK CLASSIC SERIES



min 5° Roof Pitch. Roof / Ceiling / Wall panel.

762mm Panel Cover
9.400m unsupported span

Classic Series is ideal for Straight, Convex, Concave, Multi curved and Bull Nose curving

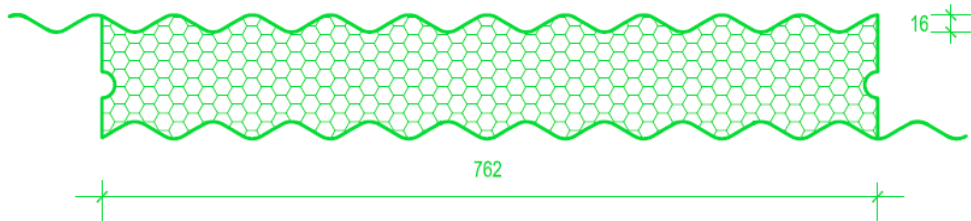

Product Description:

Tridek **Classic Series** combines roof, insulation and ceiling in one structural load bearing panel. An external skin of Colour steel or Zinalume, with the traditional look of 10 rib corrugated profile. **Classic Series** is suitable for all roof applications of 5° pitch and upwards. The panel offers the potential to create attractive roof lines with a minimum of exposed structure.

CLASSIC SERIES is suitable for use in either short or long run applications and has the ability to span in excess of 8.000m unsupported. It is ideal for use in both roofing and walling applications.



Specification:

Core Thickness	Lengths	Core Material	Thermal Rating	Finishes Top	Finishes underside	Panel skins	Fire Properties
100mm 125mm 140mm 165mm 200mm 250mm Other sizes by request	Cut to order max 23m. Longer lengths by negotiation.	SL Grade Polystyrene *Also available in Polyurethane Polyisocyanurate Contact Tridek for specifications	R2.235 R2.868 R3.248 R3.882 R4.768 R6.035 R Value SL grade EPS core Winter @ 15° C	10 rib	10 rib	Coloured steel Zincalume Galvanised. Severe environment materials also available.	Fire rated to Group 1. Material. Test standard AS ISO 9705-2003

Standard Panel Skin Materials:(A range of alternative materials are available. i.e. Stainless Steel, Aluminium).


Steel	Thickness	Substrate	Colour	Typical panel weight. M2
External (upper) skin Ceiling (under) skin	0.42 BMT Also available in: 0.48 BMT 0.60 BMT	Zincalume or Coloured AZ 150 G550 steel. Zincalume or Coloured AZ150 G550 steel	Full colour range Full colour range Metallic colours on application	9.7kg. 75mm 10.1kg. 100mm 10.5kg. 125mm 10.7 kg 140mm 11.0 kg 165mm 11.6 kg 200mm

Spans. Non Cyclonic Wind Regions. Single span on rake (m). (Cyclonic spans also available).

Wind Rating	100 mm panel	125mm panel	140mm panel	165mm panel	200mm panel	250mm panel
W33-N2	6.200m	7.500m	8.00m	8.400m	9.400m	10.400m
W41-N3	5.00m	5.700m	6.400m	7.400m	8.00m	8.300m
W50-N4	4.10m	4.700m	5.200m	5.700m	6.500m	6.800m
W60-N5	3.40m	3.900m	4.300m	4.500m	5.300m	5.600m

Due to Zipperlock Steel Buildings Pty Ltd ongoing commitment to product development the company retains the right to amend data or change without notice.

For panels and applications outside the above specifications contact the Tridek Sales office for further design assistance and engineering data.

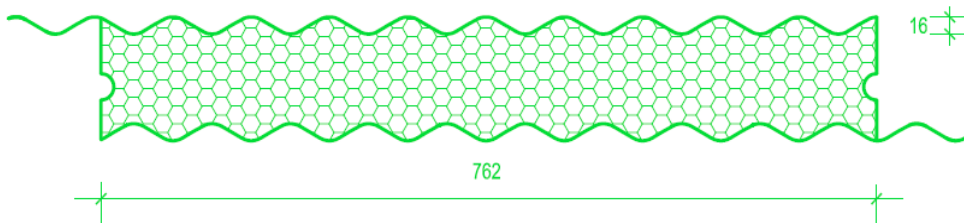

CLASSIC SERIES

Zipperlock Steel Buildings Pty Ltd ABN: 63 450 242 064 T/as Tridek Roofing
P.O. Box 932 Bayswater Vic 3153. Tel: 03 9720 4305. Fax: 03 9729 1888
enquiry@tridekroofing.com.au www.tridekroofing.com.au

© July 2017 Zipperlock Steel Buildings Pty Ltd. Not to be copied without permission.