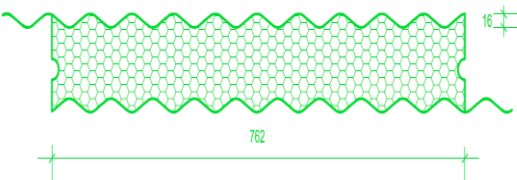
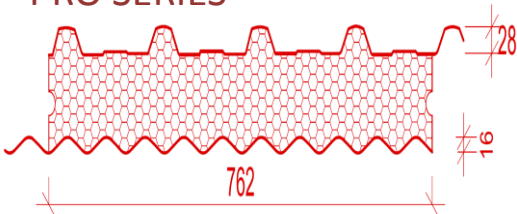
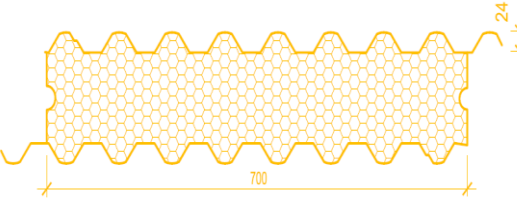
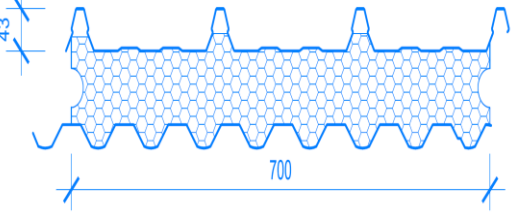


## PRODUCT RANGE

Series	Shape	Pitch	Cover mm	Thickness mm.	Thermal Value	Roof Walls
<b>CLASSIC SERIES</b> 	Straight	5° +	762	100	R 2.235	✓ ✓
	Curved			125	R 2.868	✓ ✓
	Multi Curved			140	R 3.248	✓ ✓
	Bull Nosed			165	R 3.882	✓ ✓
				200	R 4.768	✓ ✓
	250	R 6.035	✓ ✓			
<b>PRO SERIES</b> 	Straight	2° +	762	100	R 1.753	✓ ✓
	Curved			125	R 2.387	✓ ✓
	confirm radius with Tridek			140	R 2.767	✓ ✓
				165	R 3.400	✓ ✓
				200	R 4.287	✓ ✓
	250	R 5.554	✓ ✓			
<b>SMART SERIES</b> 	Straight	2° +	700	100	R 2.032	✓ ✓
	Curved			125	R 2.665	✓ ✓
	confirm radius with Tridek			140	R 3.046	✓ ✓
				165	R 3.679	✓ ✓
				200	R 4.566	✓ ✓
	250	R 5.833	✓ ✓			
<b>ICON SERIES</b> 	Straight only	1° +	700	125	R 1.905	✓ ✓
				140	R 2.285	✓ ✓
				165	R 2.919	✓ ✓
				200	R 3.806	✓ ✓
				250	R 5.072	✓ ✓

Please consult the Tridek Sales Office for availability of other core thickness and confirmation of curve radii. For all design and engineering data for specific panel types, consult the individual data sheets or Tridek Design Manual or directly contact our sales office. [enquiry@tridekroofing.com.au](mailto:enquiry@tridekroofing.com.au) or [www.tridekroofing.com.au](http://www.tridekroofing.com.au)

Due to our ongoing commitment to product development and testing Zipperlock Steel Buildings Pty Ltd T/A Tridek Roofing retains the right to amend or change data without notice. © July 2017 Zipperlock Steel Buildings Pty Ltd. Not to be copied without permission.

TRIDEK Roofing P.O. Box 932, Bayswater, VIC 3153 -- Tel 03 9729 1777 or FAX 03 9729 1888

[enquiry@tridekroofing.com.au](mailto:enquiry@tridekroofing.com.au) or [www.tridekroofing.com.au](http://www.tridekroofing.com.au)